


# Kanaflo MK (212 MK)

Heavy-duty food grade suction and discharge hose

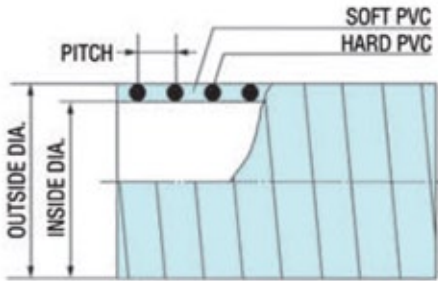

## SPECIFICATIONS

**Temp. Range:** -13°F to 140°F

**Applications:** More flexible; designed for milk hauling (tank truck) and pick-up

**Construction:** Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

## AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1-1/2	1.82	0.30	2.0	66	29.8	0.44	100
2	2.39	0.33	2.5	66	29.8	0.74	100
2-1/2	2.93	0.37	4.7	66	29.8	1.01	100
3	3.43	0.37	6.1	62	29.8	1.21	100



\* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**