


Kanaflex®

KANALINE SR

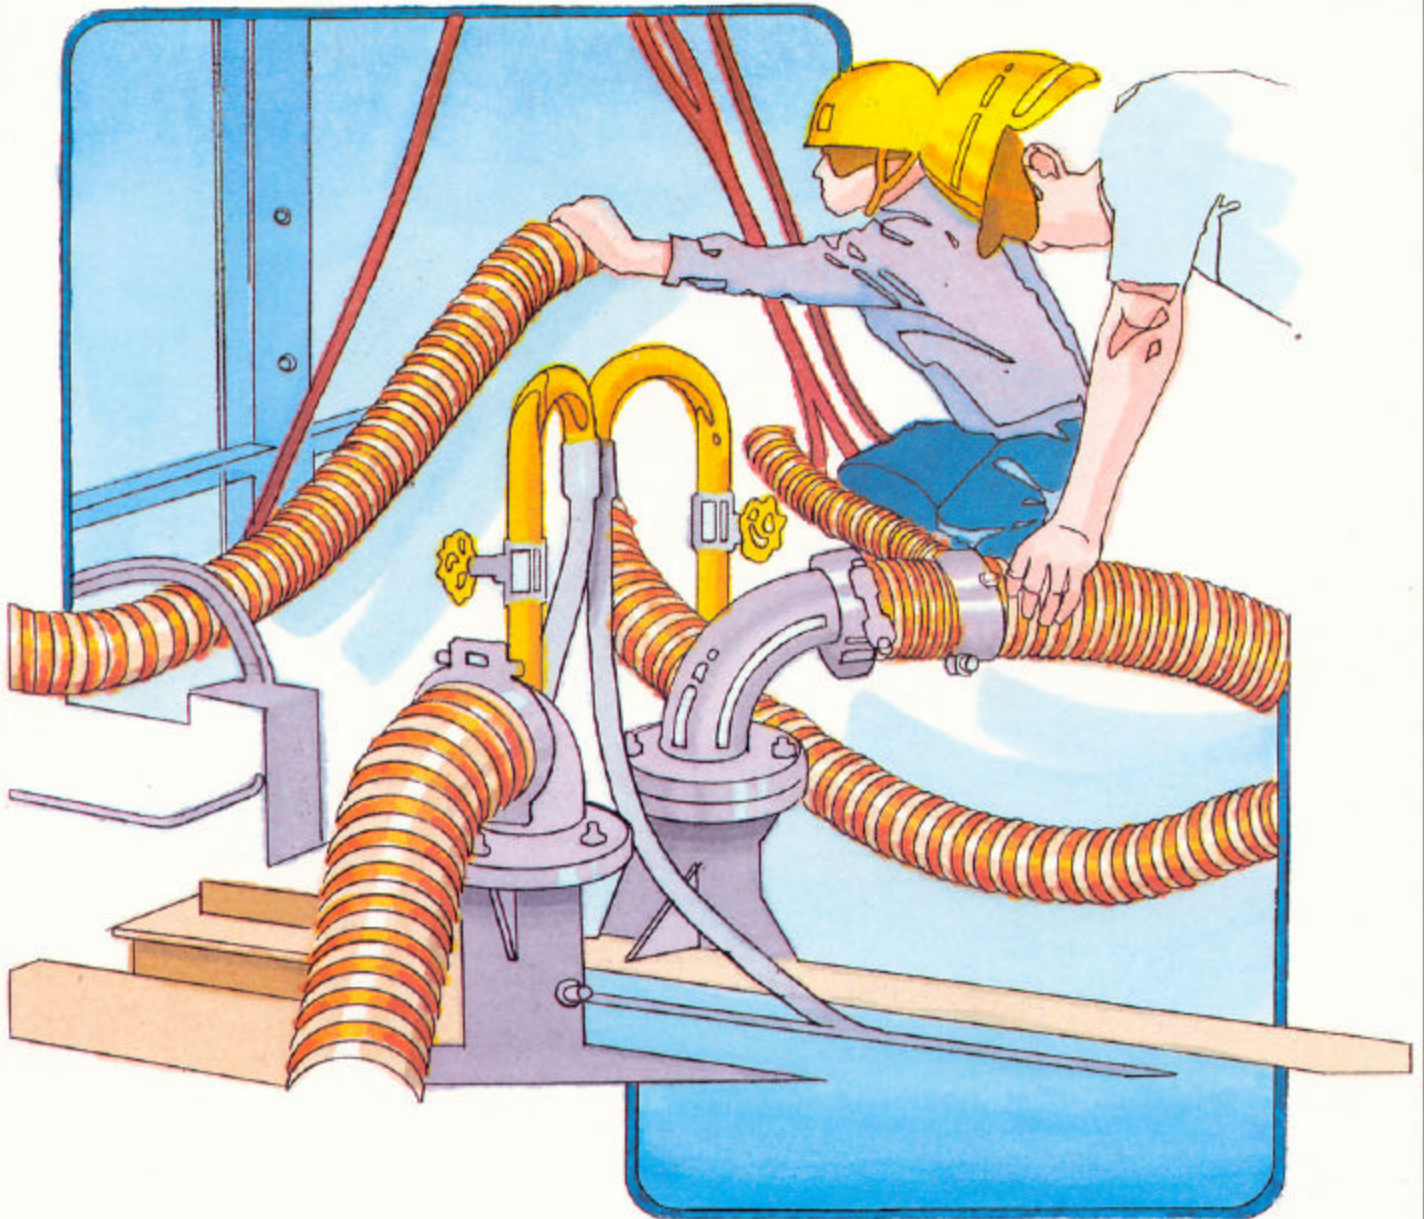

Kanaline SR is a new water suction and discharge hose designed for demanding service. This PVC hose is **reinforced with braiding** to withstand pressure while maintaining excellent flexibility and light weight. It is suitable for fish suction and for water pumping in construction applications.

Kanaflex®

KANALINE SR

Exposed helix . . . acts as a scuff guard, permits wash water to flow underneath and allows easy drag.

Braided reinforcement . . . permits use under higher working pressure. Will take full vacuum. Will not stretch or elongate.

Smooth bore . . . provides unrestricted flow.

Clear sidewall . . . permits visual check of material flow.



SPECIFICATIONS

SIZE	OUTSIDE DIAMETER Inches	PITCH Inches	MIN. BENDING RADIUS 72°F, Inches	WORKING PRESSURE 72°F, P.S.I.	BURSTING PRESSURE 72°F, P.S.I.	VACUUM RATING 72°F, In. / Hg.	WEIGHT Lbs. / Ft.
1 1/2"	2.01	0.35	2.0	125	375	28	0.41
2"	2.58	0.39	3.5	125	375	28	0.65
3"	3.60	0.59	3.5	125	375	28	1.07
4"	4.72	0.65	7.1	100	300	28	1.74
6"	7.17	0.94	10.2	50	150	28	3.87
8"	9.33	1.10	15.7	50	150	28	5.34
10"	11.63	1.26	24.8	36	100	28	8.67

Kanaflex®
CORPORATION

800 Woodlands Parkway
Vernon Hills, IL 60061

DISTRIBUTED BY: