

Kanaflex®

100 CL



The 100 CL PVC hoses is a lighter, more flexible, and easier to handle suction hose which is ideal for **general water suction**. Designed for both residential and light commercial applications, it is an economic alternative for small- to medium-size pumping jobs.

Kanaflex®

100 CL

General water suction hose

Corrugated exterior for superior flexibility


Weatherproof . . . highly resistant to ozone, salt water, and ultraviolet light

Pliable . . . fits over pipe ends for flexible installations where ground and structure is subject to movement

Smooth bore . . . permits unrestricted flow.

Functional . . . can be “welded” to rigid PVC pipe using conventional PVC cement

Secure . . . provides a superior hold to rigid pipe when used with Kanaflex pipe-size “Power Lock” clamps

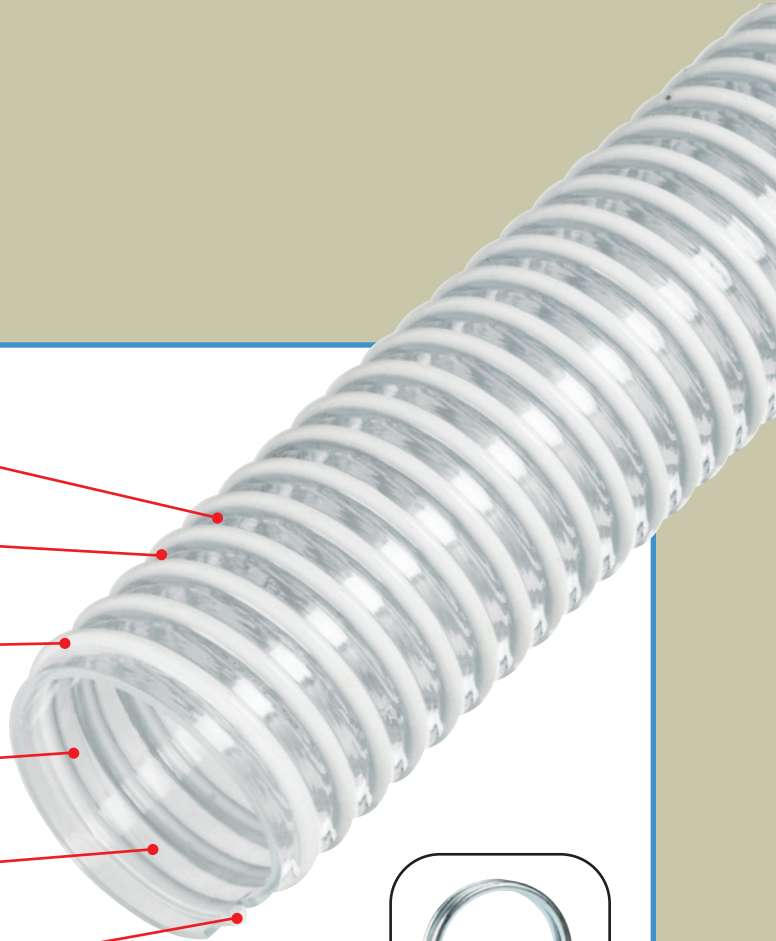

**Powerlock Clamp PS
(Pipe Size)**

Most sizes available in lengths of 100 feet for rapid installations and lower labor costs

Temp. Range: -13°F to 140°F

Applications: General water suction hose

Construction: Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1	1.25	.30	1.5	50	29.8	.18	100
1¼	1.52	.33	2.0	45	29.8	.22	100
1½	1.81	.35	2.5	45	29.8	.35	100
2	2.36	.39	3.0	40	29.8	.50	100
2½	2.87	.56	4.5	35	29.8	.68	100
3	3.50	.59	6.0	35	29.8	1.00	100
4	4.63	.65	8.0	30	29.8	1.52	100
6	6.85	.87	11.0	30	28.0	3.10	50,100
8	9.04	.91	16.0	30	28.0	5.38	25
10	11.26	1.02	30.0	30	28.0	8.88	20

Kanaflex®
CORPORATION

800 Woodlands Parkway
Vernon Hills, IL 60061

Distributed By: