

620 WD, 620 WD WS



RUBBER BLOWER/DUCT HOSE

The EDPM construction is developed for industries where abrasive applications are required, such as collecting grass, street refuse, saw dust, wood chips, etc.

Features:

- ABRASION RESISTANCE
- FLEXIBLE
- WEATHERABILITY
- RATED TO 220°F
- ECONOMICAL





Kanaflex[®]
CORPORATION

Kanaflex®

SERIES 620 WD & 620 WD WS

ABRASION RESISTANT BLOWER/DUCTING HOSE

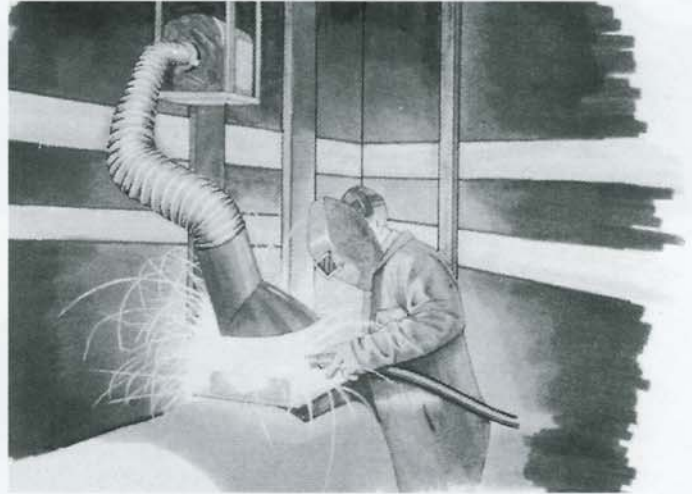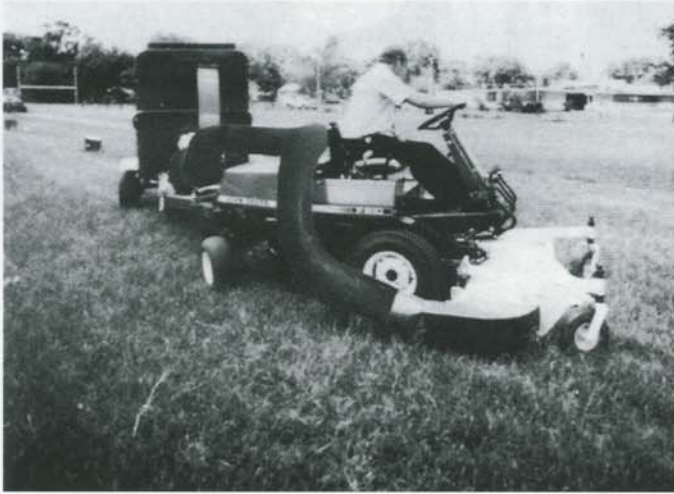

- LIGHTWEIGHT
- SMOOTH BORE
- EXTREMELY FLEXIBLE
- - 40° TO 220°F TEMPERATURE



← 620 WD

← 620 WD WS

I.D., Inches	O.D., Inches	PITCH, Inches	MINIMUM BENDING RADIUS 72°F, Inches	WORKING PRESSURE 72°F, P.S.I.	VACUUM RATING 72°F, In./Hg	WEIGHT, lbs/ft.	STANDARD LENGTH
2-1/2	3.00	.58	3.0	12	9.0	.44	50'
3	3.37	.60	3.0	12	8.0	.55	50'
4	4.39	.65	4.0	9	6.0	.73	50'
5	5.43	.88	5.0	7	5.0	.84	50'
6	6.36	.87	6.0	6	4.0	1.04	50'
7	7.32	.89	7.0	5	4.0	1.17	50'
8	8.35	.92	8.0	4	4.0	1.38	50'
10	10.45	1.02	10.0	3	4.0	2.40	50'
12	12.40	1.20	12.0	3	4.0	2.50	25'

2-1/2	3.11	.58	3.0	12	9.0	.48	50'
3	3.48	.60	3.0	12	8.0	.61	50'
4	4.57	.65	4.0	9	6.0	.85	50'
5	5.61	.88	5.0	7	5.0	.90	50'
6	6.54	.87	6.0	6	4.0	1.17	50'
7	7.48	.89	7.0	5	4.0	1.27	50'
8	8.54	.92	8.0	4	4.0	1.50	50'
10	10.69	1.02	10.0	3	4.0	2.67	50'
12	12.60	1.20	12.0	3	4.0	2.80	25'

Kanaflex®

CORPORATION

800 Woodlands Parkway
Vernon Hills, IL 60061

DISTRIBUTED BY: