

Kanaflex®

KANADUCT



The unique interlock construction of the Kanaduct makes it self-supporting and provides the ability to actually change I.D. size.

Typical applications:

- Spot coolers
- Clean room venting
- Fume removal
- Dust removal
- Elbows for rigid pipe

Kanaflex® KANADUCT


Flexible . . . can be bent, twisted and turned easily without breaking.

Self supporting . . . rigid enough to retain its shape.

50% expandable . . . diameter can be increased or decreased simply by twisting hose by hand. (see illustration below)

Flame retardant characteristics.

Durable . . . resists abrasion and withstands temperatures from -40 to 180°F.

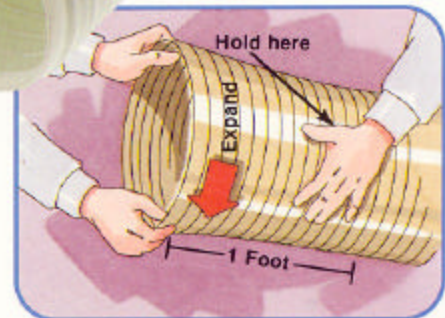

SPECIFICATIONS

SIZE	OUTSIDE DIAMETER Inches	MIN. BENDING RADIUS 72°F, Inches	WEIGHT Lbs. / Ft.
2 1/2"	2.80	6	0.35
3"	3.23	7	0.36
4"	4.20	11	0.52
5"	5.20	14	0.76
6"	6.16	15	0.79
8"	8.06	20	1.07
10"	10.21	27	1.52
12"	12.07	32	1.68

Kanaflex®
CORPORATION

800 Woodlands Parkway
Vernon Hills, IL 60061

DISTRIBUTED BY: