

# Kanaflex®

## 390 SD



*Tough and light enough to take it.*

Series 390 SD all weather suction/discharge hose. Use it everyday for industrial, construction and agricultural applications where pressure is a factor.


*The Perfect Hose for Handling...*

- Dry and Liquid Fertilizers
- Agricultural Chemicals
- Light Abrasives
- Water/Slurry
- Seed



# Kanaflex®

SERIES 390 SD (100% EPDM) ALL-WEATHER SUCTION/DISCHARGE HOSE.  
**THE BEST HOSE TO DO THE JOB RIGHT.**

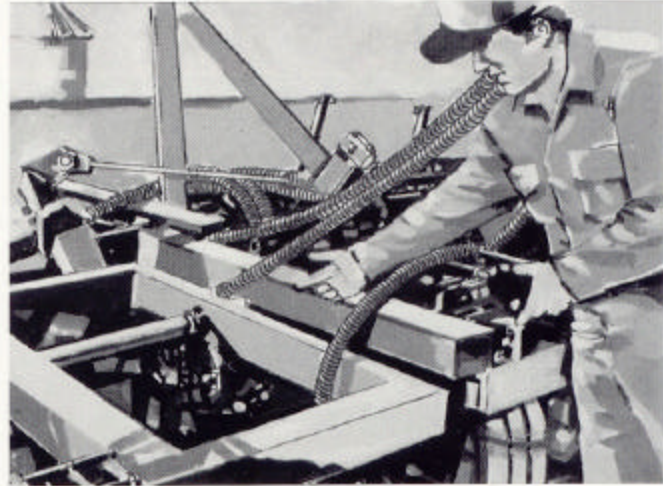

• Construction • Rental Equipment • Agricultural • Cesspool/Sewer Cleaning • Plant Maintenance

**Long life** . . . abrasion resistant cover lasts longer than PVC and conventional rubber hose.

**Weatherproof** . . . Kanaflex is highly resistant to temperature changes and deterioration by sun, ozone or mildew.

**Easy drag** . . . exposed helix makes handling easy.

**Flexible** . . . lends itself to working in tight spaces. Flexible in low temperatures especially when compared to PVC.

**Lightweight** . . . up to 50% lighter than conventional rubber hose, so it's easier to handle and less expensive to transport.

**Smooth bore** . . . combined with smooth bending characteristics, makes for the fastest, most efficient transfer of materials.

**Braided** . . . allows for heavier working pressure.

## Kanaflex® SERIES 390 SD SPECIFICATIONS:

INSIDE DIAMETER, Inches	OUTSIDE DIAMETER, Inches	PITCH, Inches	MIN. BENDING RADIUS, 72°F, Inches	WORKING PRESSURE, 72°F, P.S.I.	VACUUM RATING, 72°F, In./Hg.	WEIGHT, Lbs./Ft.
1-1/4	1.60	.47	3.0	100	29.8	.34
1-1/2	1.87	.47	3.0	100	29.8	.47
2	2.42	.47	5.0	100	29.8	.61
3	3.54	.59	7.0	90	29.8	1.10

Temperature range:—40° to 158° F.

Refer to chemical resistant chart in our catalog.

**Kanaflex®**  
CORPORATION

800 Woodlands Parkway  
Vernon Hills, IL 60061

DISTRIBUTED BY: